

VITECH IMPORT CO., LTD

VITECH
Vision and smart Technology

Để biết thêm thông tin chi tiết về VITECH
vui lòng liên hệ bộ phận **chăm sóc khách hàng** của chúng tôi:
CÔNG TY TNHH XUẤT NHẬP KHẨU CÔNG NGHỆ VITECH

Website: www.vitechlift.com

Hotline: (024)3. 520 588

CSKH: 0867 192 588

Email: vitech.elevator@gmail.com

Copyright: Vitech Import Co., Ltd
VITECH Profile 2025.03



PROFILE
C O M P A N Y

“

Kính gửi Quý khách hàng & Quý đối tác

Với khát vọng đột phá công nghệ, xây dựng và sáng tạo giải pháp có giá trị vì con người, VITECH đã khẳng định vị thế tiên phong trong lĩnh vực cung cấp thiết bị, linh kiện thang máy và kỹ thuật hàng đầu tại Việt Nam.

Công ty TNHH xuất nhập khẩu công nghệ VITECH với sứ mệnh trở thành nhà cung cấp thiết bị, linh kiện thang máy với chất lượng và dịch vụ tốt nhất. Chúng tôi đã có những bước phát triển vượt bậc, và trở thành đối tác bán hàng tin cậy trên khắp mọi miền tổ quốc. Luôn đi đầu trong việc áp dụng công nghệ mới với giá thành cạnh tranh nhất, chất lượng tốt nhất đã giúp VITECH trở thành nhà cung cấp hàng đầu cho các đơn vị hợp tác và nhà đầu tư suốt thời gian qua.

Mạng lưới dịch vụ bao phủ rộng khắp là thế mạnh của VITECH, mọi yêu cầu từ Quý khách hàng & Quý đối tác đều được đáp ứng nhanh chóng. Với phương châm kinh doanh “Xây dựng niềm tin cùng chất lượng đỉnh cao” và đội ngũ nhân sự giàu nhiệt huyết, đam mê. Chúng tôi luôn đặt lợi ích của Khách hàng, Đối tác, chất lượng sản phẩm và uy tín của công ty lên hàng đầu. VITECH luôn nỗ lực hết mình để tạo nên những sản phẩm hiện đại, chất lượng và phù hợp với nhu cầu, thị hiếu của khách hàng.

Chúng tôi mong muốn hợp tác với tất cả các Quý khách hàng & Quý đối tác trong và ngoài nước, là đối tác tin cậy, người bạn đồng hành cùng xây mối quan hệ bền vững.

Trân trọng!

”

GIÁM ĐỐC



VŨ THỊ THU LA

Best **Quality**
Price

and

First **Choice**

SỨ MỆNH

Cung ứng và kiến tạo giải pháp có giá trị cho con người hướng tới cuộc sống tốt đẹp hơn. Đóng góp vào sự phát triển của nền kinh tế - xã hội đất nước.

TÂM NHÌN

Dẫn đầu Việt Nam trong lĩnh vực cung cấp thiết bị, linh kiện và dịch vụ kỹ thuật ngành thang máy.

GIÁ TRỊ CỐT LÕI

Cam kết giữ uy tín
Chủ động sáng tạo mỗi ngày
Hướng tới khách hàng
Tôn trọng con người
Có trách nhiệm với xã hội
Ý chí dẫn đầu
Nỗ lực vượt trội



About VITECH

VITECH là nhà cung cấp thiết bị và linh kiện thang máy hàng đầu tại Việt Nam. Hiện tại, VITECH có hơn 3000 danh mục hàng hóa và được chỉ định là nhà phân phối của các thương hiệu uy tín trên thế giới.

Thành lập

6

Nhân sự

100+

Đối tác

1000+

Kho hàng

2000m²

“VITECH là công ty hàng đầu tại Việt Nam chuyên cung cấp linh kiện và thiết bị thang máy. Với các sản phẩm chất lượng, đội ngũ nhân sự nhiều kinh nghiệm VITECH cam kết mang đến giải pháp thang máy hiện đại, an toàn và bền bỉ.”



DỊCH VỤ CHUYÊN NGHIỆP HẬU MÃI TẬN TÂM

- Dịch vụ 24/7, bao gồm các ngày nghỉ lễ.
- Kho hàng 2000m2 với nhiều thiết bị và linh kiện có sẵn nên đáp ứng nhanh chóng.
- Mạng lưới đại lý rộng khắp các tỉnh thành, phục vụ chuyên nghiệp.
- Đội ngũ kỹ sư, chuyên gia nhiều kinh nghiệm, khả năng đáp ứng nhu cầu đa dạng của từng khách hàng trong việc hỗ trợ kỹ thuật.
- Giá thành cạnh tranh và đa dạng về hình thức phù hợp với yêu cầu của từng khách hàng.

Hotline kỹ thuật
0867 182 588



CAM KẾT SẢN PHẨM & DỊCH VỤ

Chúng tôi cam kết:

- Cung cấp linh kiện và thiết bị thang máy chính hãng, đạt tiêu chuẩn quốc tế.
- Đa dạng sản phẩm, phù hợp với mọi loại thang máy, từ dân dụng đến công nghiệp.
- Đội ngũ chuyên gia luôn sẵn sàng tư vấn và xử lý sự cố nhanh chóng.
- Chính sách bảo hành minh bạch, đảm bảo quyền lợi khách hàng.
- Kho hàng luôn sẵn sàng, đảm bảo cung ứng kịp thời.
- Dịch vụ hậu mãi tận tâm, đồng hành cùng khách hàng trong suốt quá trình sử dụng.

“VITECH mang đến dịch vụ tư vấn chuyên sâu giúp khách hàng lựa chọn linh kiện và thiết bị thang máy phù hợp nhất. Đội ngũ kỹ thuật viên giàu kinh nghiệm luôn sẵn sàng hỗ trợ, giải đáp mọi thắc mắc và đưa ra giải pháp tối ưu.

Bên cạnh đó, VITECH cung cấp chính sách bảo hành minh bạch, dài hạn, đảm bảo chất lượng sản phẩm trong suốt quá trình sử dụng.”



Hotline bán hàng

0867 192 588

"Meet our team"



VĂN PHÒNG VÀ NHÂN SỰ

Với đội ngũ hơn 100 nhân sự giàu kinh nghiệm cùng hệ thống kho hàng thông minh, VITECH không ngừng nỗ lực và hoàn thiện, khẳng định là doanh nghiệp đi đầu trong lĩnh vực cung ứng thiết bị và linh kiện thang máy

I NGUYÊN TẮC ỨNG XỬ



VITECH

01

VỚI KHÁCH HÀNG

- Uy tín
- Tận tâm



VITECH

02

VỚI NHÀ CUNG CẤP

- Minh bạch
- Hiệu quả



VITECH

03

VỚI CẤP TRÊN

- Chủ động
- Trách nhiệm



VITECH

04

VỚI CẤP DƯỚI

- Gương mẫu
- Hỗ trợ



VITECH

05

VỚI ĐỒNG NGHIỆP

- Thân thiện
- Giúp đỡ



VITECH

06

VỚI CỘNG ĐỒNG

- Trách nhiệm
- Sẻ chia

I NGUYÊN TẮC LÀM VIỆC

CHỦ ĐỘNG

Luôn luôn chủ động trong công việc

01

ƯU TIÊN

Biết ưu tiên việc quan trọng

02

MỤC TIÊU

Có mục tiêu, thái độ rõ ràng trong công việc

03

KHÁCH HÀNG

Luôn luôn thỏa mãn hướng tới khách hàng

04

HỌC HỎI

Hướng tới sự chuyên nghiệp học hỏi không ngừng

05

HỢP TÁC

Hợp tác, chia sẻ và tìm giải pháp vì mục tiêu chung

06



PHÒNG HÀNH CHÍNH KẾ TOÁN



PHÒNG XUẤT NHẬP KHẨU

I KHO HÀNG



KHO HÀNG

Với sự đầu tư nghiêm túc và dài hạn, VITECH sở hữu kho vận thông minh linh hoạt có quy mô trên 2000m² được xây dựng theo tiêu chuẩn chất lượng cao, vận hành thông minh. Toàn bộ quá trình nhập kho, kiểm tra dự liệu, xếp hàng đóng gói và phân phối được thực hiện chuyên nghiệp, đảm bảo tính chính xác của đơn hàng.



I VĂN HÓA PHỤC VỤ KHÁCH HÀNG



**VÌ KHÁCH HÀNG
CÓ NHU CẦU**

Chúng ta mới có
việc để làm

**VÌ KHÁCH HÀNG
CÓ QUYỀN LỰA CHỌN**

Chúng ta là lựa chọn
tốt hơn

**VÌ KHÁCH HÀNG
CÓ SỰ NHẠY CẢM**

Chúng ta cần chu đáo
trong từng khâu vận hành

**VÌ KHÁCH HÀNG
MUỐN KHẨN CẤP**

Chúng ta cần phải
nhạy nhen

**VÌ MỖI KHÁCH HÀNG
ĐỀU KHÁC BIỆT**

Chúng ta cần phải
linh hoạt

**VÌ KHÁCH HÀNG
CÓ SỨC ẢNH HƯỞNG**

Chúng ta cần phải
vượt trội

I SẢN PHẨM TIÊU BIỂU

KPM-G45R (450kg 0.5-1.75(m/s))
KPM-G63R8 (630kg 0.5-1.75(m/s))

Gearless Traction Machine

Made in JAPAN 

Series	Speed (m/s)	Capacity code
KPM-G45R	0.5-1.75	450kg
KPM-G63R8	0.5-1.75	630kg

Traction Machine Parameter

- Roping: 2:1
- Sheave PCD DIA (mm): 320
- Static Load (kg): 2000
- Machine Weight (kg): 200
- Brake Type: SDZK-5500JR
- Brake Volt (DC-V): 110
- Brake AMP (A): 1.09
- Brake Torque (N.m): 2x445
- Encoder: Heiderhain ERN1387



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

KPM-G80R (800kg 0.5-1.75(m/s))
KPM-G105R (1050kg 0.5-1.75(m/s))

Gearless Traction Machine

Made in JAPAN 

Series	Speed (m/s)	Capacity code
KPM-G80R	1-2	800kg
KPM-G105R	1-2	1050kg

Traction Machine Parameter

- Roping: 2:1
- Sheave PCD DIA (mm): 400
- Static Load (kg): 3000
- Machine Weight (kg): 320
- Brake Type: SDZK-8500JR
- Brake Volt (DC-V): 110
- Brake AMP (A): 1.4
- Brake Torque (N.m): 2x85
- Encoder: Heiderhain ERN1387



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

FJE 200

Gearless Traction Machine

Made in Korea 

Model	Speed (m/s)	Capacity code
200	1.0 - 1.75	450kg

Traction Machine Parameter

- Suspension: 2:1
- Voltage: 380V
- Pole: 20
- Rating: S5 (40%)
- INS. Class: F
- IP code: IP41
- Max. Static Load: 1800kg
- Weight: 140kg



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

FJE 200

Gearless Traction Machine

Made in Korea 

Model	Speed (m/s)	Capacity code
200	1.0 - 1.75	630kg

Traction Machine Parameter

- Suspension: 2:1
- Voltage: 380V
- Pole: 20
- Rating: S5 (40%)
- INS. Class: F
- IP code: IP41
- Max. Static Load: 2000kg
- Weight: 180kg



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

I SẢN PHẨM TIÊU BIỂU

FJE 325


Gearless Traction Machine

Made in Korea 🇰🇷

Series	Speed (m/s)	Capacity code
325	0.63 - 1.6	320kg - 500kg

Traction Machine Parameter

- Traction Ratio: 2:1
- Rated capacity: 320 - 500kg
- Rated elevator speed: 0.63, 1.0, 1.6, 1.75m/s
- Max. shaft load: 2200kg
- Applicable converter: 3 Phase 320V
- Brake voltage: DC 110V
- Number of motor poles: 20 poles
- Insulation: F

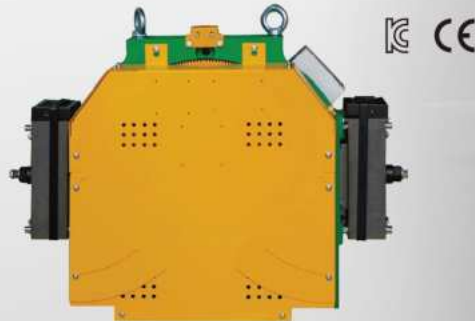

Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

FJE 400

Gearless Traction Machine

Made in Korea 🇰🇷

Series	Speed (m/s)	Capacity code
400	0.63 - 2.0	630kg - 1150kg

Traction Machine Parameter

- Traction Ratio: 2:1
- Rated capacity: 630 - 1000kg
- Rated elevator speed: 0.63, 1.0, 1.6, 1.75m/s
- Brake electric current: 2 x 1.35A
- Applicable converter: 3 Phase 320V
- Brake voltage: DC 110V
- Number of motor poles: 32 poles
- Insulation: F



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

FJE 410/480

Gearless Traction Machine

Made in Korea 🇰🇷

Series	Speed (m/s)	Capacity code
410/480	0.63 - 2.0	1250kg - 3500kg

Traction Machine Parameter

- Traction Ratio: 2:1; 4:1
- Rated capacity: 1250 - 3500kg
- Rated elevator speed: 0.63, 1.0, 1.6, 1.75, 2.0m/s
- Brake electric current: 2 x 1.5A
- Applicable converter: 3 Phase 320V
- Brake voltage: DC 110V
- Duty type: S5 40%



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

FJE 500


Gearless Traction Machine

Made in Korea 🇰🇷

Series	Speed (m/s)	Capacity code
500	1.0 - 2.5	800kg - 2500kg

Traction Machine Parameter

- Max. shaft load: 6000kg
- Applicable converter: 3 phase 400V
- Brake voltage: DC110
- Brake current: 2x2.2A
- Working time: S5 40%
- Insulation: F

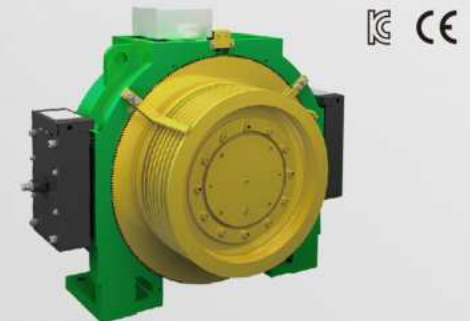

Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

I SẢN PHẨM TIÊU BIỂU

FJT 320



Gearless Traction Machine

Made in Thailand 

Series	Speed (m/s)	Capacity code
320	0.5 - 2.0	450kg

Traction Machine Parameter

- Rated Voltage: AC 380V
- Brake Voltage: DC 110V
- Pole: 24
- Weight: 200kg
- Shaft load (kg): 2000kg
- Work duty: S5-60%
- Insulation: F



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

FJT 400

Gearless Traction Machine

Made in Thailand 

Series	Speed (m/s)	Capacity code
400	1.0 - 2.0	630kg - 1050kg

Traction Machine Parameter

- Rated Voltage: AC 380V
- Brake Voltage: DC 110V
- Pole: 40
- Weight: 320kg
- Shaft load (kg): 3000kg
- Work duty: S5-60%
- Insulation: F



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

TORIN GTW7A

Gearless Traction Machine

Made in Thailand 

Series	Speed (m/s)	Capacity code
GTW7A	1 - 1.75	320 - 630kg

Traction Machine Parameter

- Voltage: 380V
- Rated capacity: 320 - 630kg
- Suspension: 2:1
- FZD10 Brake: DC110V 2x0.84A (2x1.46A)
- Weight: 190kg
- Max.Static Load: 2000kg
- Insulation: F



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

TORIN GTW9S

Gearless Traction Machine

Made in Thailand 

Series	Speed (m/s)	Capacity code
GTW9S	1 - 2	630 - 1000kg

Traction Machine Parameter

- Voltage: 380V
- Rated capacity: 630 - 1000kg
- Suspension: 2:1
- Brake: DC110V 2x1.0A
- Rating: S5(49%)
- Max.Static Load: 3000kg
- Insulation: F



Features

- Short axial length, suitable for machine roomless elevator application.
- High efficiency with high torque density design.
- Small size, simple structure with high utilization of materials.
- Machine low speed operation smooth, with low noise and small vibration.
- Use block armless brake with high reliability.

I SẢN PHẨM TIÊU BIỂU

FJE CONTROL CABINET

Made in Korea

- Remote technical support through APP.
- Remote monitoring through the IoT.
- Communication encoder supported.
- Balance coefficient auto-tuning.
- Noise reduction design < 50dBA.

Model	Voltage	Power range	Origin	Option
FJE-C	4:3 Phase 380	008: 8.3kW 017: 17kW 022: 22kW 037: 37kW	K. KOREA	White Green





Solution Highlights

Noise control for MRL	Excellent comfort	Small size & low weight
50dBA No contact noise (STO version)	High-performance DSP Improve 150%	Size: 230×190×760 18kg
10dBA Radio noise control reduce 100%	PI adaptive algorithm	Conductive to the layout of MRL
12K High frequency running Reduce motor running noise		

Solution Highlights

Parameters Setting Free	Reduce fault rate	Specialist remote guidance
Motor tuning You need motor tuning in factory (work with communication encoder)	Cabinet Maintenance-free	Support APP remote guidance
Function: One-click debugging	STO version maintenance-free	Reduce travel expenses
Floor number learning automatically Door lock state learning automatically PI adaptive control Balance setting Dynamic holding brake force testing	PESSRAL solution UCMP board long life cycle	

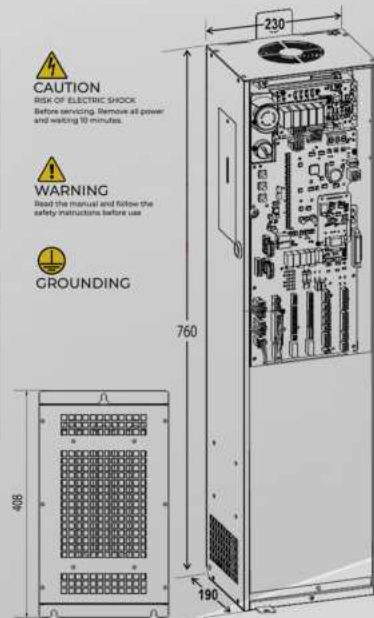

KJP - G7 KJP CONTROL CABINET

Made in JAPAN

- Power Supply: Three-phase, 200V~440V
- Frequency: 50 / 60Hz
- Stop Floor: 48 stops (floors)
- Speed: 15~600m/min
- Purpose: Passenger / Passenger & Freight / Freight
- Communication protocol: CANbus, RS485 serial communication
- Encoder: Incremental.SIN / COS / Endat.Inovance (Communication)
- Traction Machine: Worm - Gearless
- Group-operation: 8cars

Type	Dimensions (mm)	Installation Mode
5.5~18.5kW	990X440X230	Wall-mounting/Floor



ORIGINAL SPEC

Functional aspect


- The priority of manual switches (car top > inside car > pit > control panel) follows the specifications of domestic elevator manufacturers.
- Switch box of operation board, and PI remote control are in accordance with the specifications of domestic elevator manufacturers.
- All the individual control operations comply with elevator technical standards and JEAS regulations.
- Functions for alerting earthquake, fire, power outage, and flooding, and for self-diagnosis, and single-automatic-operation.
- The display inside cabin & lobby (partially) supports English.
- The auto-announcement function supports English.

Hardware aspect

- Safety-related signals will continue to be implemented through hardware (wires, relays) as before. Utilize products which are made by domestic maker (such as Fuji, etc.) or any other global maker (such as Schneider)
- The selection of product capacity is based on the standards of domestic elevator manufacturers.

Others

- Maintenance & adjustment of the control panel are available via a tablet APP
- Applicable to remote inspection system

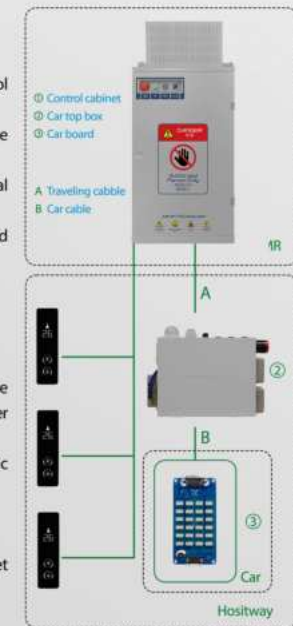

STEP

AS380 CONTROL CABINET

Made in Thailand 🇹🇭

- Intergrated inverter and control system.
- Ability to add or remove floor easily.
- The cabinet run stably and is safe for users.
- Use 32-bit CAN bus communication system to trabsmit control signals.

Type	Dimensions (mm)	Installation Mode
5.5 -15 kw	1120X580X300	Wall-mounting/Floor
18.5-22 kw	1120X580X300	Floor standing
30 - 37 kw	1320X510X275	Floor standing



STEP

AS380 NON NOISE

Made in Thailand 🇹🇭

- Intergrated inverter and control system.
- Ability to add or remove floor easily.
- The cabinet run stably and is safe for users.
- Use 32-bit CAN bus communication system to trabsmit control signals.
- Noise reduction design < 55dBA.

Type	Dimensions (mm)	Installation Mode
5.5 -15 kw	1120X580X300	Wall-mounting/Floor
18.5-22 kw	1120X580X300	Floor standing
30 - 37 kw	1320X510X275	Floor standing



FJT - V1

FJT CONTROL CABINET

Made in Thailand 🇹🇭

- Smooth ride Performance.
- Wide input Voltage operation.
- Programmable I/O's.
- 3 Level password protection.
- Dedicated on board 110VAC/DC safety feedback.
- Noise reduction design < 55dBA.

Type	Dimensions (mm)	Installation Mode
5.5 -15 kw	1120X560X240	Wall-mounting/Floor
18.5-22 kw	1120X560X240	Floor standing
30 - 37 kw	1320X510X275	Floor standing



FJT - V2

FJT CONTROL CABINET

Made in Thailand 🇹🇭

- Smooth ride Performance.
- Wide input Voltage operation.
- Programmable I/O's.
- 3 Level password protection.
- Dedicated on board 110VAC/DC safety feedback.

Type	Dimensions (mm)	Installation Mode
5.5 -15 kw	1120X560X240	Wall-mounting/Floor
18.5-22 kw	1120X560X240	Floor standing
30 - 37 kw	1320X510X275	Floor standing





I HOẠT ĐỘNG



I VÌ SAO LỰA CHỌN VITECH?



VÌ SAO LỰA CHỌN VITECH?

VITECH là đơn vị cung cấp linh kiện và thiết bị thang máy hàng đầu tại Việt Nam, được khách hàng tin tưởng nhờ chất lượng sản phẩm vượt trội và dịch vụ chuyên nghiệp. Chúng tôi mang đến giải pháp toàn diện cho mọi loại thang máy, từ dân dụng đến cao cấp, với sản phẩm chính hãng đạt tiêu chuẩn quốc tế.

GIẢI PHÁP TOÀN DIỆN

- Sản phẩm chất lượng cao, tư vấn chuyên nghiệp.
- Thông tin chi tiết về sản phẩm và các phương án kỹ thuật.

QUY TRÌNH CHUYÊN NGHIỆP

- Thiết lập quy trình chuẩn giúp gia tăng hiệu quả công việc đồng thời đảm bảo đúng tiến độ cam kết với khách hàng

ĐỐI TÁC CÓ KINH NGHIỆM

- Sản phẩm chất lượng mang tính toàn cầu với giá cả cạnh tranh và các chi phí hợp lý nhất.

ĐỐI TÁC ĐỒNG HÀNH ĐÁNG TIN CẬY

- Mỗi quan hệ lâu dài thành công, chia sẻ lợi nhuận và cùng phát triển.

I CHỨNG NHẬN



Thank you!

"Bạn cần sản phẩm tốt, chúng tôi cho bạn giá tốt
Bạn cần giá tốt, chúng tôi cho bạn sản phẩm tốt nhất"